


# ZSE 27 iMAXXX

Data sheet

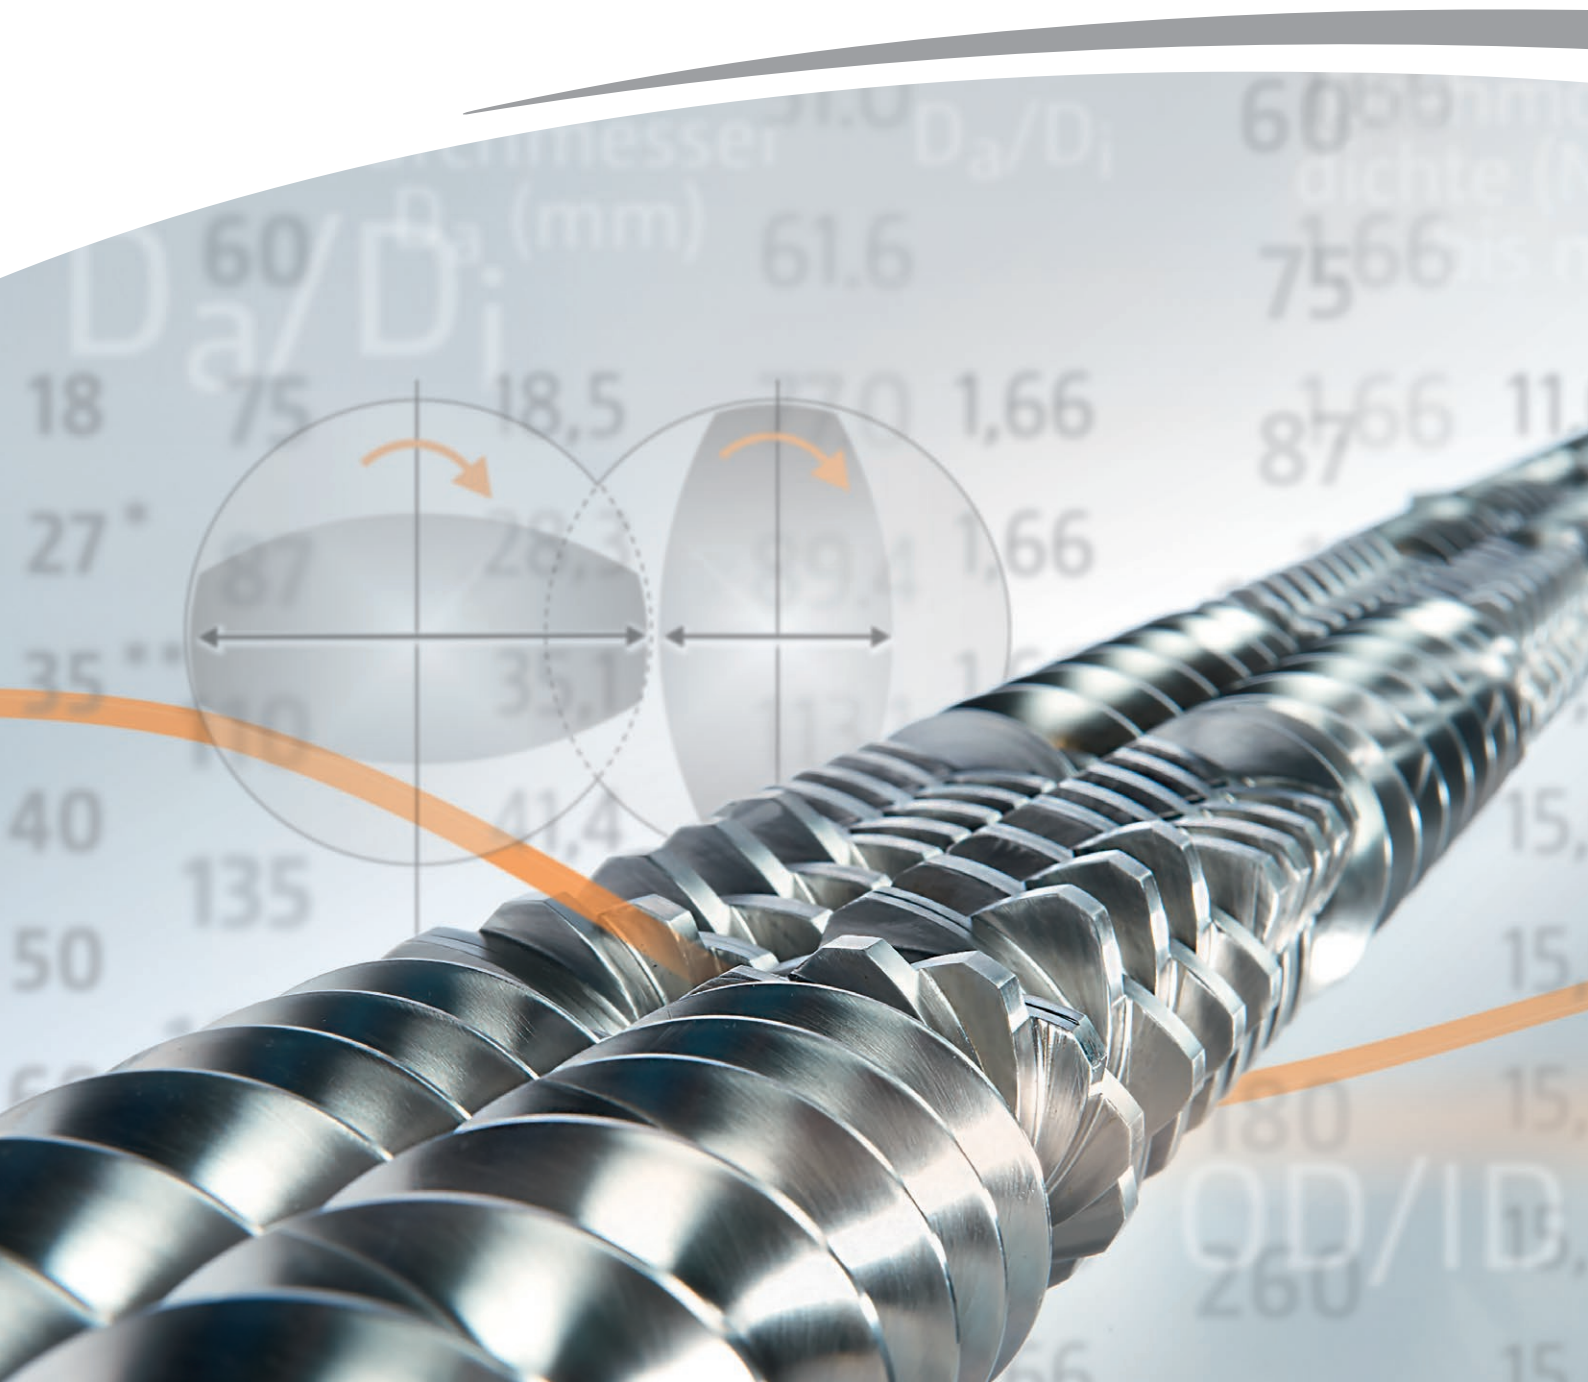


ZSE 27 iMAXX	
Screw diameter (mm)	28.3
Flight depth (mm, without tolerance)	5.6
OD/ID	1.66
maXXstandard-torque (Nm)	256
maXXtorque (Nm)	304
Screw speed (rpm)	600, 1,200
Weight (kg)	~ 1,000

*\* No responsibility is taken for the correctness of the specifications provided. The specified values depend on the used material type and its consistence as well as on the environmental variables (temperature, humidity etc.) and further factors. Weight and dimensions depend on the processing length (length provided in mm) among other things. If you inform us of your individual demands we will gladly make a binding offer.*

When it comes to developing new formulations and processes or scaling-up to production level, then the ZSE 27 iMAXX is the optimum choice. The technical data is the same as that of ZSE 27 MAXX, but with its “i”ntegrated design it provides several advantages:

- no additional control cabinet necessary, since electrics incl. frequency converter are integrated in the frame: better accessibility and easier maintenance
- closed primary and secondary water-circuit (in- and outlet installed in media channel)
- inspection window for safety coupling
- new, water-cooled Siemens motor
- degree of protection IP54

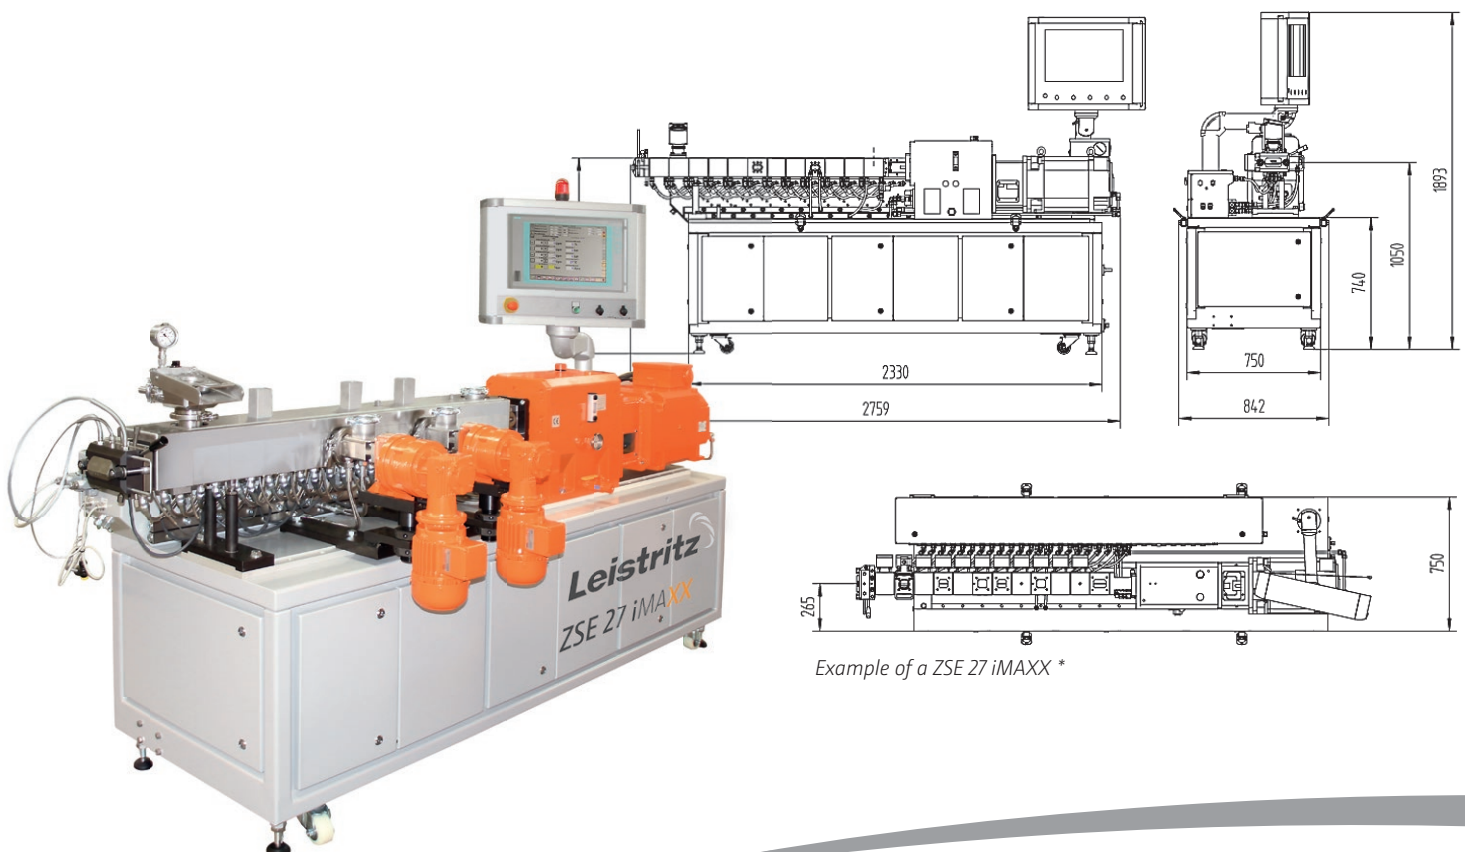

Example of a ZSE 27 iMAXX \*