


ZSE 27 MAXX

Data sheet

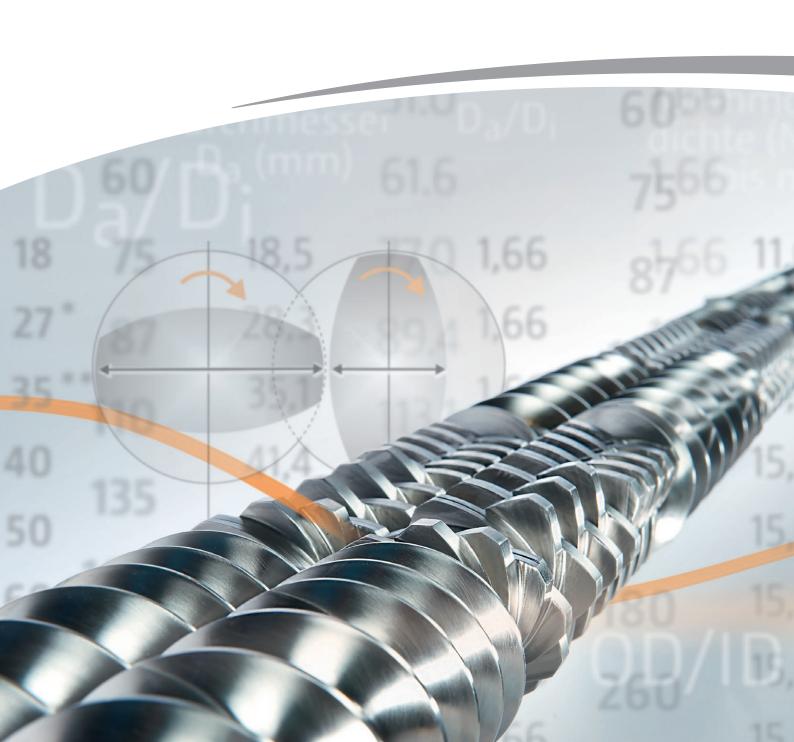

ZSE 27 MAXX	
Screw diameter (mm)	28.3
Flight depth (mm, without tolerance)	5.6
OD/ID	1.66
maXXstandard-torque (Nm)	256
maXXtorque (Nm)	304
Screw speed (rpm)	600, 1,200
Weight (kg)	~ 1,000

^{*} No responsibility is taken for the correctness of the specifications provided. The specified values depend on the used material type and its consistence as well as on the environmental variables (temperature, humidity etc.) and further factors. Weight and dimensions depend on the processing length (length provided in mm) among other things. If you inform us of your individual demands we will gladly make a binding offer.

Applications area:

- research and development
- development of formulations and processes as well as scale-up to production scale
- manufacturing of samples and small batches in production operation (24h continuous operation)

