


# ZSE 40 MAXX


Data sheet

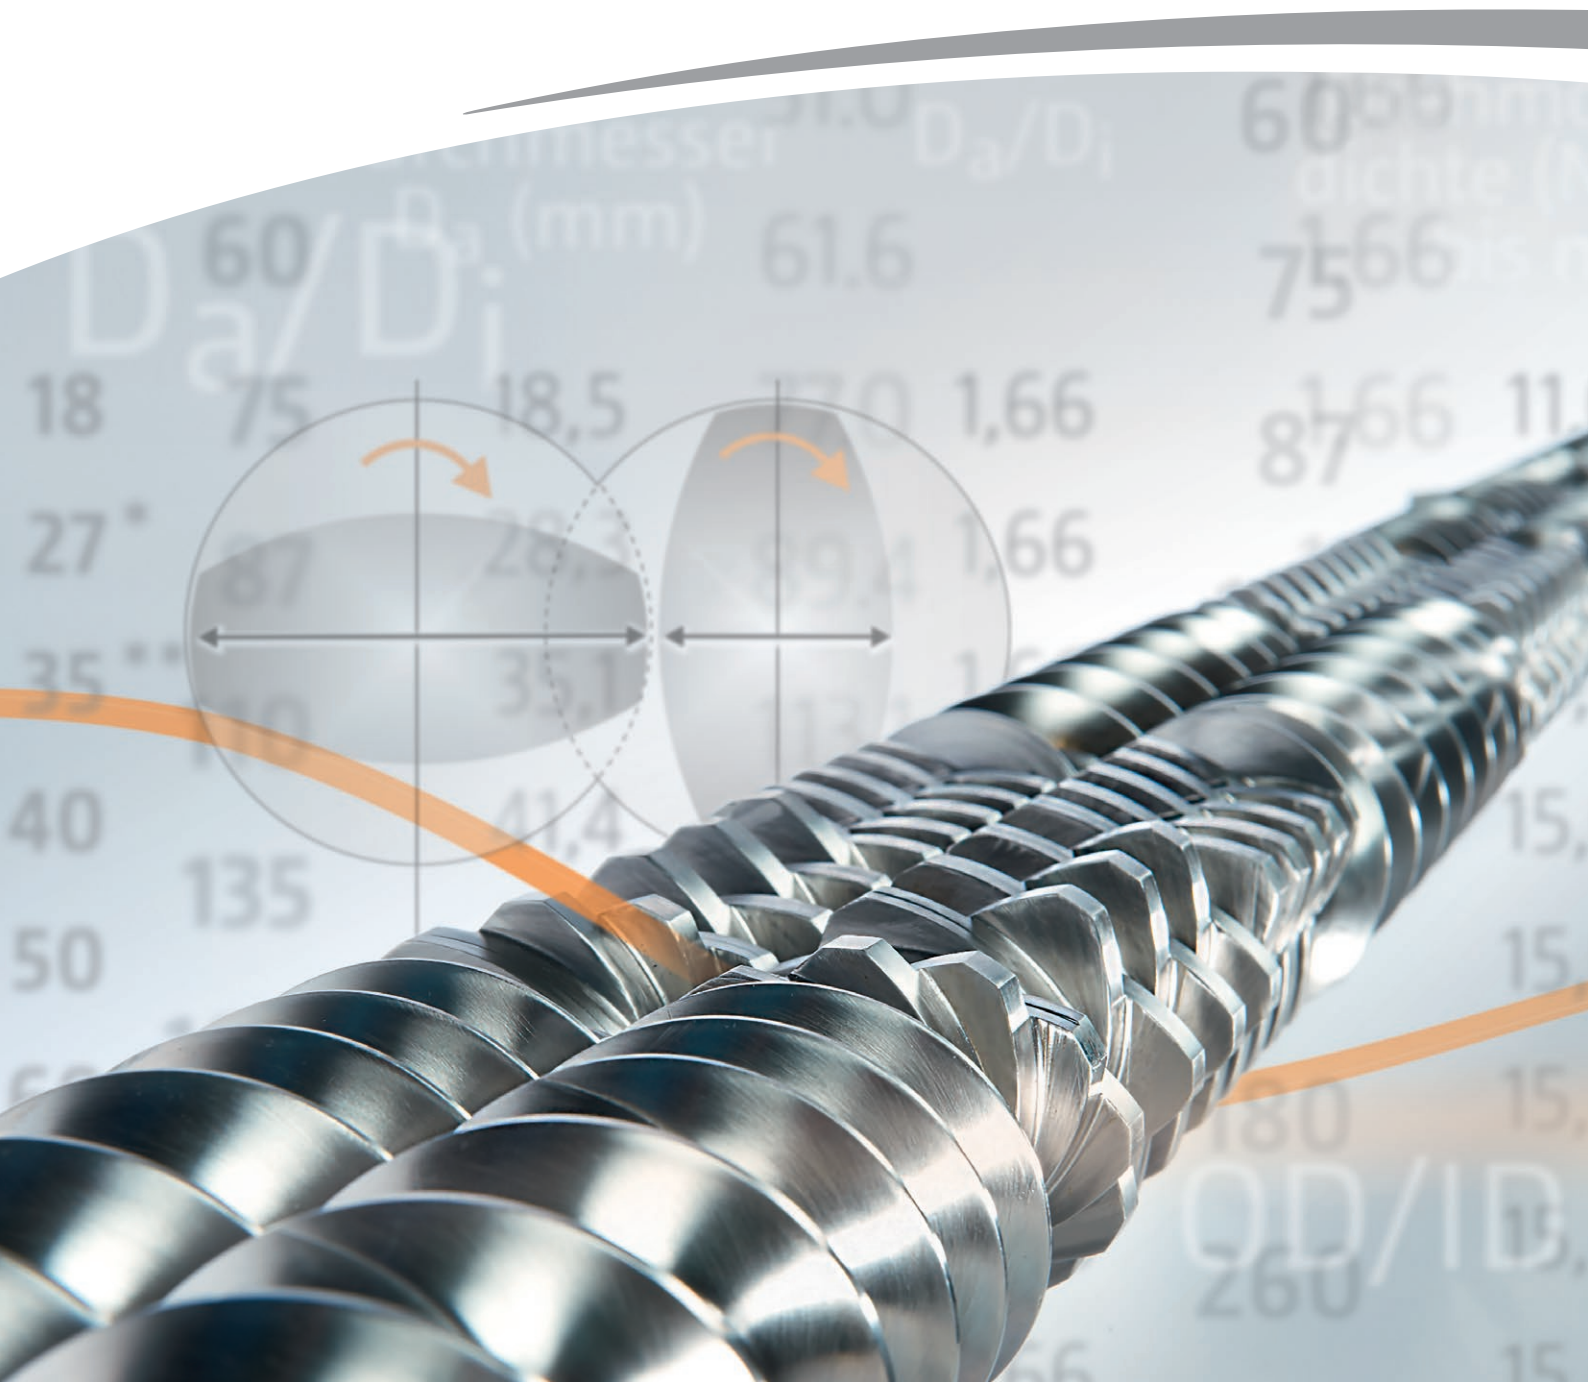

D <sub>a</sub> (mm)	L (mm)	D <sub>a</sub> /D <sub>i</sub>
18	75	1,66
27	109,4	1,66
35	135	1,66
40	135	1,66
50	135	1,66
60	135	1,66
60	180	1,66
75	260	1,66
87	260	1,66
100	260	1,66
110	260	1,66
125	260	1,66
150	260	1,66
180	260	1,66
200	260	1,66
225	260	1,66
260	260	1,66

ZSE 40 MAXX	
Screw diameter (mm)	41.4
Flight depth (mm, without tolerance)	8.3
OD/ID	1.66
maXXstandard-torque (Nm)	790
maXXtorque (Nm)	1,128
Screw speed (rpm)	300, 600, 900, 1,200
Weight (kg)	~ 2,200

*\* No responsibility is taken for the correctness of the specifications provided. The specified values depend on the used material type and its consistence as well as on the environmental variables (temperature, humidity etc.) and further factors. Weight and dimensions depend on the processing length (length provided in mm) among other things. If you inform us of your individual demands we will gladly make a binding offer.*

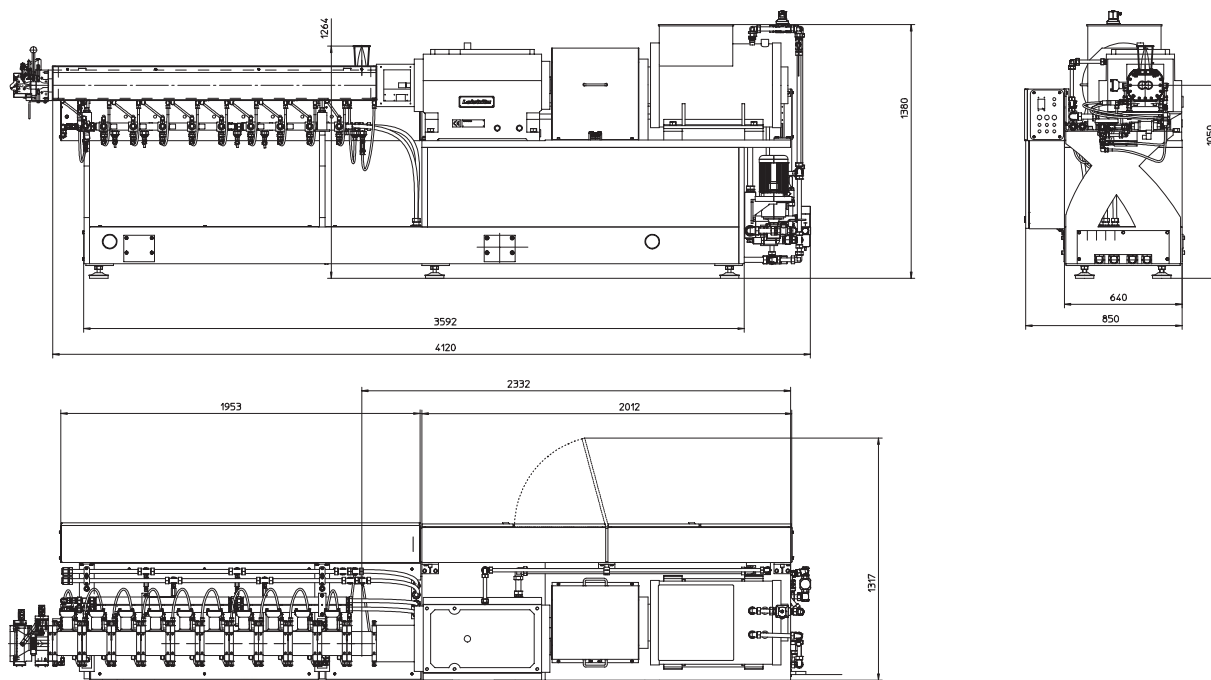

Example of a ZSE 40 MAXX \*

